

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 23 TOWNSHIP 15 RANGE 3

DATE: 6-19-01 6-27-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 5-27-95



IN. S.P.C. E ZONE NAD '83

NAME: 15032302

N: 498430.1594(m)

E: 56991.1488(m)

Raymond St. 2200 s

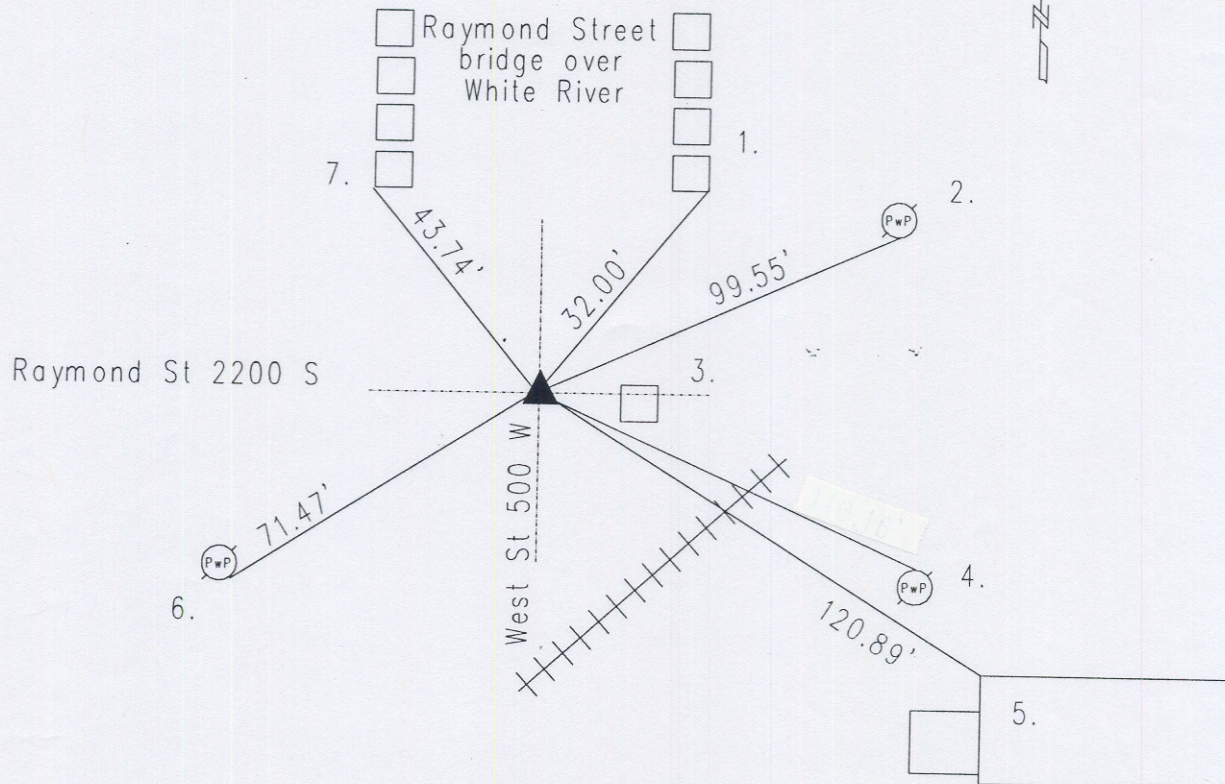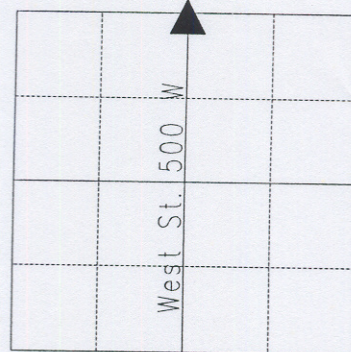

Original post set 1820 by Laughlin with witnesses: 10" buckeye W 14 links, 10" dogwood S 55 E 14 links per Marion County Atlas pg. 6. Records indicated no stone nor witness found. Graham 10-11-79 called a railroad spike. 2-24-87 called the same. Excavated by Wilcoxon 5-27-95 and set Harrison. According to construction project. Re-tied 6-19-01 by Wilcoxon.

15032302

REF.	DISTANCE	DESCRIPTION
1.	32.00'	SE corner of sutherly most bridge pillar
2.	99.55'	PK nail S PwP no# 30"up
3.	11.19'	Due E to cut 'x' SW-side of storm inlet
4.	110.07'	PK nail N pwP#417-605 15"up
5.	120.89'	NW corner of brick at concrete foundation
6.	71.47'	PK nail S pwP#34-604 B 12"up
7.	43.74'	SW corner southerly most bridge pillar